


Exhibit C-21: Bridge Load Rating
Memorandum, Prepared by: DCG
(April 13, 2017)




MEMORANDUM

TO: Mike Janicki
Dan Cox
FROM: Jordan M. Janicki, PE, SE
DATE: April 13, 2017
RE: Janicki Logging 40ftx14x Bridge Load Rating
Location: Off Grip Road, Sedro-Woolley, WA

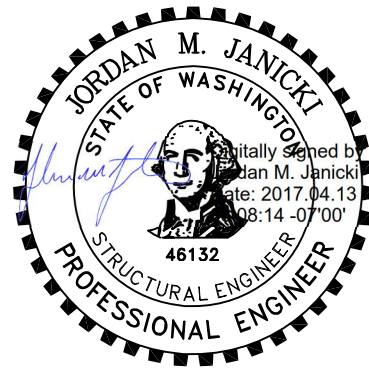

The Davido Consulting Group has analyzed the load rating capacity of the main structural members of the Janicki Logging Bridge located off the Grip Road in Sedro-Woolley, based on the photos and descriptions from Mike Norris. W36x184 were used in the analysis for the girders and W12x40's was assumed for the cross purlins based on Janicki Logging drawings from 2/18/99. Based on the analysis the bridge rated for HL-93, and HS-25 loading. The limiting factor in the design is the shear capacity of the concrete decking limiting the rating to HS-25

The main bridge girders and the cross members have a much greater capacity than is required for this loading and have the capability of supporting up to U80 off highway loads. Please contact DCG if a higher load rating is required for a specific load case.

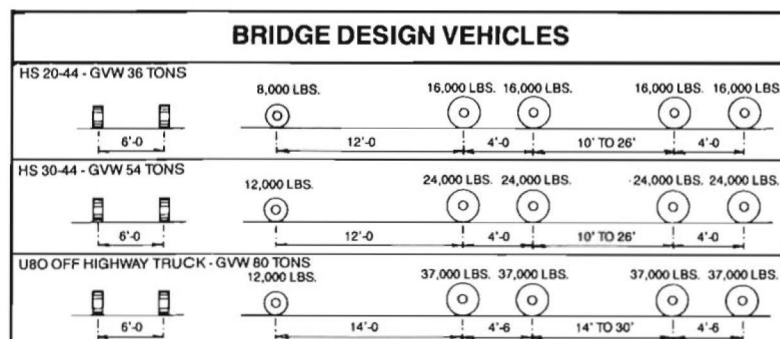

Mount Vernon Office
2210 Riverside Drive, Suite 110
Mount Vernon, WA 98273
Tel 360.899.1110

Lake Forest Park Office
15029 Bothell Way NE, Suite 600
Lake Forest Park, WA 98155
Tel 206.523.0024
005978

Whidbey Island Office
PO Box 1132
Freeland, WA 98249
Tel 360.331.4131